

DS-K1108A
Pro 1108A Series Card Reader

- Supports RS-485, Wiegand (W26, W34) protocol, and OSDP protocol
- Supports reading EM card (Frequency: 125 KHz) (DS-K1108AE/DS-K1108AEK)
- Supports reading M1 card (Frequency: 13.56 MHz). Supports reading Desfire&Felica card (DS-K1108AD/DS-K1108ADK)
- Tamper-proof function
- Built-in buzzer for status indication

▪ Specification

Interface	
RS-485	1 RS-485. Supports OSDP protocol, Baud 9600, 19200, 38400
Authentication	
Card radio frequency standard	ISO 14443-A
General	
Power supply	12 VDC, 2 W
Power consumption	≤ 2 W
Working temperature	-20 °C to 65 °C (-4 °F to 149 °F)
Working humidity	10% to 90% (no condensing)
Protective level	IP65
Dimensions	123 mm × 88 mm × 21 mm (4.84" × 3.46" × 0.83")
Installation	Wall mounting
Weight	Gross weight: 0.37 kg (0.82 lb) Net weight: 0.14 kg (0.31 lb)
Keypad	DS-K1108AE/DS-K1108AM/DS-K1108AD: No keypad DS-K1108AEK/DS-K1108AMK/DS-K1108ADK: With keypad
Buzzer	Beeper
Function	
ID settings	via DIP switch

▪ Available Model

DS-K1108AMK

DS-K1108AD(STD)

DS-K1108ADK(STD)

DS-K1108AE

DS-K1108AEK

DS-K1108AM(STD)

DS-K1108AD


DS-K1108AM(NEU)

DS-K1108ADK

DS-K1108AD(STD)/HIKVISION JAPAN K.K.

DS-K1108AMK/subassembly

▪ Dimension

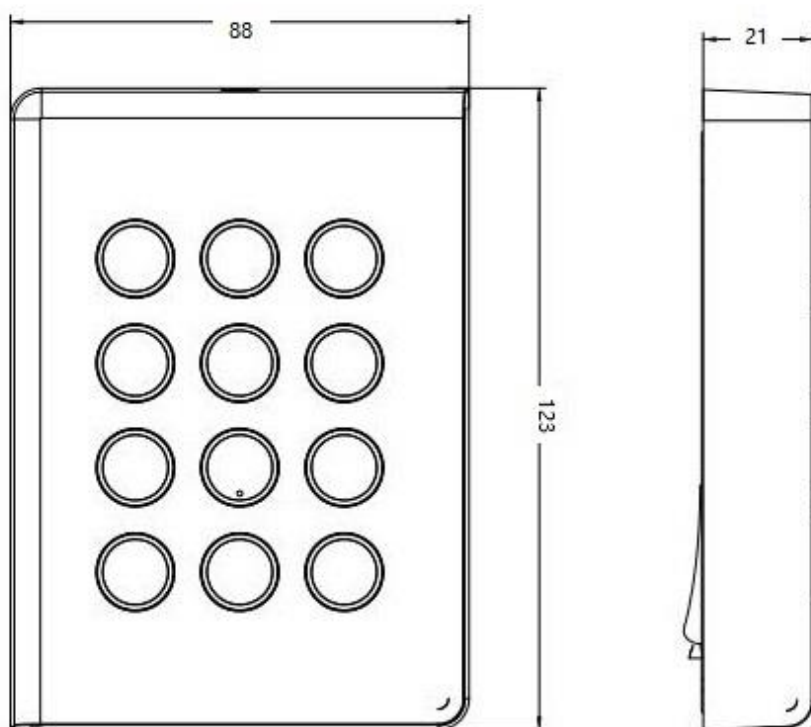

See Far, Go Further



www.hikvision.com
support@hikvision.com

