

DS-KH6350-WTE1

Video Intercom Network Indoor Station

HIKVISION




Key Feature

- New UI V2.0: User friendly design
- 7-inch colorful touch screen with resolution 1024 × 600
- Standard PoE
- Stores messages and capture pictures in the TF card
- Remote unlocking via the client software or the mobile client
- Views live videos of door stations and linked cameras

Physical Interface

No.	Description	No.	Description
1	Screen	6	TF Card Slot
2	Microphone	7	Debugging Port
3	Network Interface	8	Loudspeaker
4	RS-485 Terminal (Reserved)	9	Power Supply Terminal
5	Alarm Terminal		

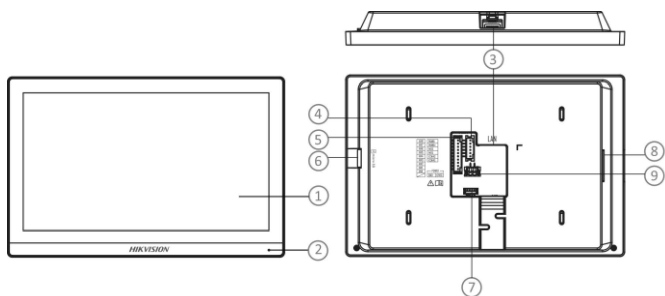

Specification

System parameters	
Operating system	Embedded Linux operation system
ROM	32 MB

RAM	128 MB
CPU	Embedded processor
Display parameters	
Screen size	7-inch colorful TFT screen
Operation method	Capacitive touch screen
Type	Colorful TFT screen
Resolution	1024 × 600
Video parameters	
Lens	/
Resolution	/
FOV	/
WDR	/
Video compression standard	/
Focal length	/
Audio parameters	
Audio compression standard	G.711 U, G.711 A
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable


Capacity	
Event capacity	200
Notice capacity	16
Linked indoor extensions capacity	5
Network parameters	
Communication protocol	TCP/IP, SIP, RTSP
Wired network	10/100 Mbps self-adaptive
Wi-Fi standard	Wi-Fi 802.11 b/g/n
Bluetooth version	/
3G/4G standard	/
Zigbee	/
Device interfaces	
Alarm input	8-ch alarm inputs
Network interface	1 RJ-45 10/100 Mbps self-adaptive
TAMPER	/
RS-485	1
USB	/
TF card	Max to 128 G
Alarm output	2
Power interface	1
General	
Button	0
Installation	Wall mounting, table mounting
Indicator	0
Weight	With package: 683 g Without package: 355 g
Protective level	/
Working temperature	-10 ° C to 50 ° C (14 ° F to 122 ° F)
Working humidity	10% to 90%
Dimensions	175 mm × 113.5 mm × 21 mm (6.9" × 4.5" × 0.83")
Battery	/
Application environment	Indoor
Power consumption	≤ 8 W

Language	English, French, Portuguese (Brazil), Spanish, Russian, German, Italian, polish, Arabic, Turkish, Vietnamese, Hungarian, Dutch, Romanian, Czech, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Portuguese, Slovak
----------	---

Available Model

DS-KH6350-WTE1

Dimension

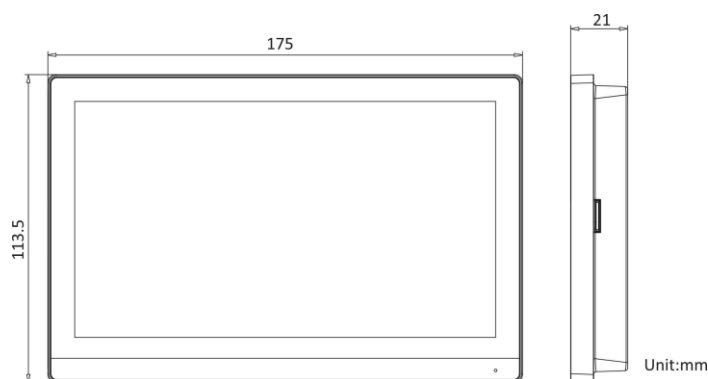

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq