

**DS-TPM400-FP**  
**Video Guidance Terminal**


- Supports access to 16 dual-lens parking cameras or 32 single-lens parking cameras
- Supports Hikvision PoE power supply for parking cameras
- Supports TPM cascade and data upload
- Supports LED display control, able to show remaining parking spaces both online and offline
- Supports IP address automatic allocation
- Large capacity distributed storage, 6x3.5-inch HDD slots, storing recordings up to 30 days
- 220V/110V switchable power supply


## ▪ Specification

Network	
Web Browser	supports Chrome, Edge, IE, Firefox
Storage	
Parking Data Storage and Uploading	Parking camera capture picture and video storage, support up to 6 HDD, 24T (each HDD 4T); Support data upload and video stream transfer.
Terminal	
Operating System	Embedded Linux Operating System
Local Operation	WEB
Interface	
Optical Interface	1 Optical Interface
Network Video Input	access of 32 channels
Alarm Output	2-ch Alarm Output (Reserved)
RS-485	2 RS485 Interfaces
USB	1 USB3.0 Interface
Network Interface	8 Internal HIKVISION POE Ethernet Interfaces; 10 1000M External Ethernet Interfaces
General	
Working Temperature and Humidity	-10°C~50°C; 10%~90%
Power Supply	100-120VAC / 200-240VAC ( default 220-240V, switch by DIP switch )
Power Consumption	< 500w
Dimensions	410 × 130 × 540 mm (16.1 × 5.1 × 21.2 inch)
Weight	15 kg (33.1 lb.)
Weight (with Package)	18 kg (39.7 lb.)
Dimensions (with Package)	544 × 249 × 634 mm (19.7 × 6.3 × 25.6 inch)

## ▪ Typical Application

### DS-TPM400-FP Design

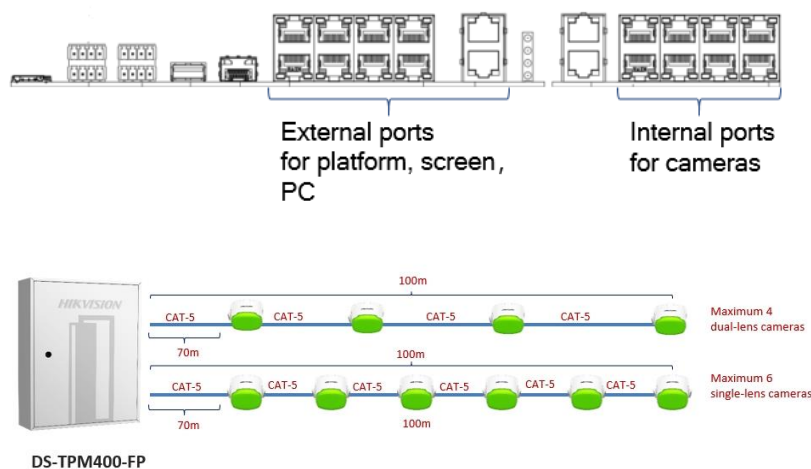

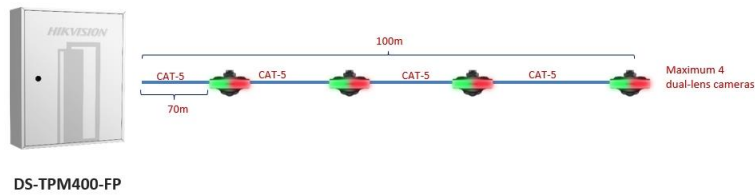

Singal-len Camera	Dual-lens Camera	Total camera with one Hik-poe port
6	0	6
5	1	6
4	1	5
3	2	5
2	2	4
1	3	4
0	4	4

The mixed connect in Hik-poe port with Singal-len Camera and Dual-lens Camera




▪ **Available Model**

DS-TPM400-FP

DS-TPM400-FP(4T)

DS-TPM400-FP(24T)

▪ **Dimension**

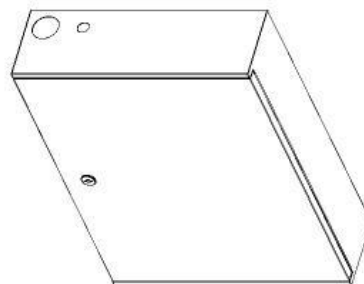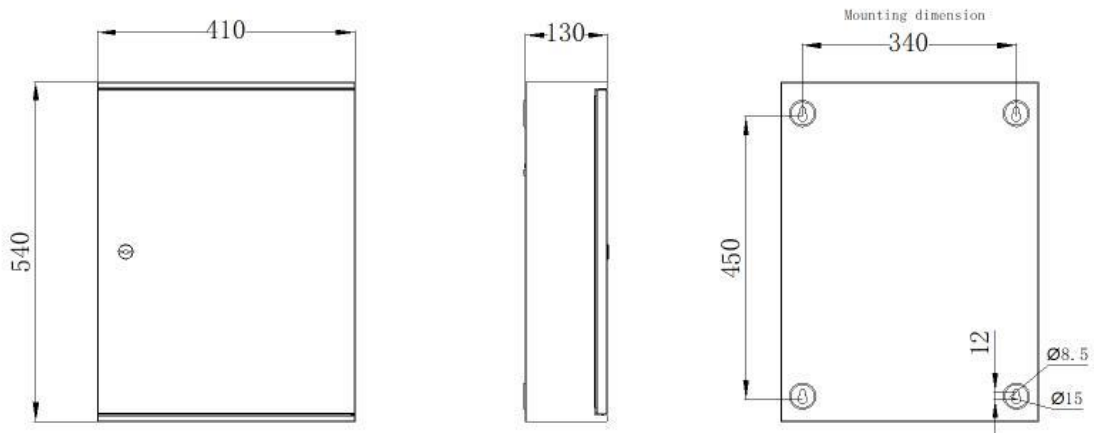

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

