
DS-UPSB09192A-R/TJC, DS-UPSB0924A-R/TJC
Battery Pack

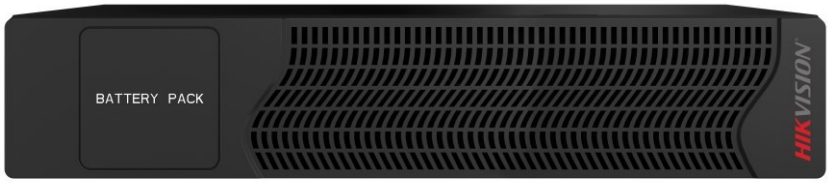


▪ Specification

Model		DS-UPSB09192A-R/TJ	DS-UPSB09240A-R/TJ
Battery	Battery Type	VRLA (Lead acid maintenance free battery)	
	Typical Recharging Time	4 hours (To 90% of full capacity)	
	Capacity (Standard Unit)	12V/9Ah	
	Battery Number	16	20
	DC System Voltage (VDC)	192V	240V
	Charging Current (Max.)	1.35A	
Environment	Operating Temperature	0° C～40° C	
	Humidity Range	0～95% (Non condensing)	
	Noise Level	＜40dB at 1 Meter	
Physical	Dimension W x D x H (mm)	440×681.5×131	
	Net weight (kg)	55	65

▪ Physical Interface

DS-UPSB09192A-R/TJ, DS-UPSB09240A-R/TJ

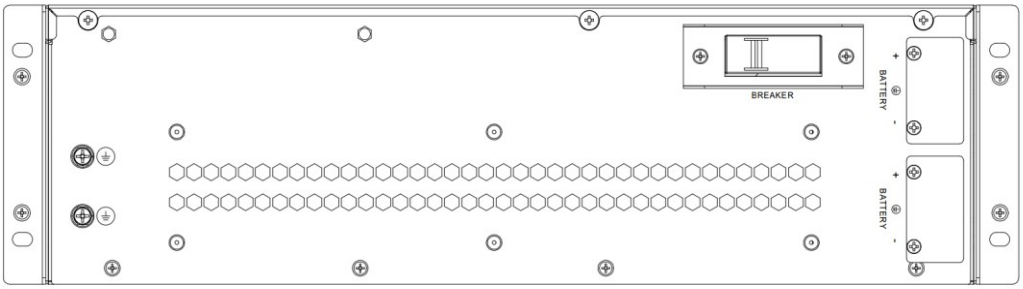

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®